

PURITY


the difference is CLEAR ...



ClarityCap[®]
AUDIO GRADE CAPACITORS



Introducing the NEW **PURITY** range from ClarityCap®

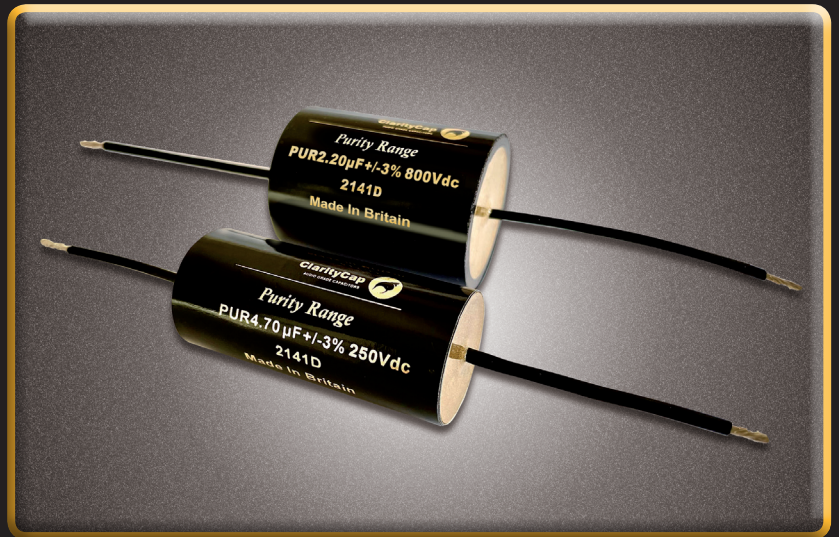

Building on over 20 years of established research and continuous customer-driven development, the latest addition to the ClarityCap® range

Featuring

- Silver-coated, multi-strand cable from **Van den Hul®**
- **10mm** CopperConnect™ technology
- $\pm 3\%$ tolerance as standard enabling tight crossover control
- High-gloss black outer, gold labelling & resin fill

Applications

- Loudspeaker passive crossover networks
- Pre-Amplifiers, Power-Amplifiers, including Valve and Phono-Amplifiers

'Allows for increased tweeter drive, resulting in more nuanced treble reproduction'

'Treble is transformed'

'Encore'

'Revealing'

'Refined'

PURITY from ClarityCap®... The difference is clear

ClarityCap®
AUDIO GRADE CAPACITORS



Available capacitor values, options and sizes*

±3%	Enhanced Super-Audio Winding						-S MR-Winding		-ST MR-Winding	
	Traditional Tape-Wrapped Product						Tubed Product			
	250Vdc		400Vdc		630Vdc		800Vdc		800Vdc	
	Diameter	Length	Diameter	Length	Diameter	Length	Diameter	Length	Diameter	Length
0.1uF						18	45	38.0	45	
0.15uF						22	45	38.0	45	
0.22uF						24	45	38.0	45	
0.33uF						30	45	38.0	45	
0.47uF			17	45	20	45	35	45	50.8	45
0.68uF			19	45	23	45	42	45	50.8	45
1.0uF	18	45	22	45	27	45	29	50	38.0	50
1.2uF	19	45	24	45	30	45	32	50	50.8	50
1.5uF	20	45	27	45	33	45	35	50	50.8	50
1.6uF	22	45	28	45	34	45	37	50	50.8	50
1.8uF	23	45	29	45	36	45	38	50	50.8	50
2.0uF	25	45	31	45	38	45	40	50	50.8	50
2.2uF	26	45	32	45	40	45	42	50	50.8	50
2.5uF	27	45	34	45	42	45	38	60	50.8	60
2.7uF	28	45	35	45	34	50	40	60	50.8	60
3.0uF	29	45	38	45	36	50	42	60	50.8	60
3.3uF	32	45	40	45	37	50	44	60	50.8	60
3.6uF	33	45	41	45	38	50	45	60	76.2	60
3.9uF	34	45	33	50	40	50	46	60	76.2	60
4.0uF	34	45	34	50	41	50	48	60	76.2	60
4.5uF	35	45	36	50	37	60	50	60	76.2	60
4.7uF	37	45	36	50	38	60	52	60	76.2	60
5.0uF	39	45	37	50	39	60	54	60	76.2	60
5.1uF	39	45	38	50	40	60	55	60	76.2	60
5.5uF	40	45	39	50	41	60	56	60	76.2	60
5.6uF	40	45	40	50	42	60	57	60	76.2	60
6.0uF	41	45	41	50	43	60	59	60	76.2	60
6.2uF	42	45	42	50	44	60	60	60	76.2	60
6.5uF	32	45	36	60	45	60	61	60	76.2	60
6.6uF	33	50	37	60	45	60	62	60	76.2	60
6.8uF	34	50	38	60	46	60	63	60	76.2	60
7.0uF	35	50	38	60	47	60	63	60	76.2	60
7.5uF	36	50	39	60	48	60	66	60	76.2	60
8.0uF	37	50	41	60	50	60	68	60	76.2	60
8.2uF	37	50	42	60	50	60	69	60	76.2	60
8.5uF	38	50	43	60	51	60	70	60		
9.0uF	39	50	44	60	53	60	72	60		
10uF	41	50	45	60	55	60	76	60		
12uF	45	50	49	60	60	60				
15uF	50	50	55	60	67	60				
18uF	54	50	60	60	73	60				
20uF	56	50	63	60						
22uF	52	60	66	60						
25uF	54	60	70	60						
27uF	56	60	73	60						
30uF	59	60								
33uF	61	60								
36uF	64	60								
39uF	67	60								
47uF	73	60								

Part-number example: PUR 2U2H800V-ST

PUR	2U2	H	800V	S	T
Purity	2.2uF	±3%	800V	MR-Winding	Acrylic Tube

*All dimensions in mm

MR = minimised resonance

PURITY

bringing you closer to the music



Charcroft Electronics Ltd
01591 610408
sales@charcroft.com
charcroft.com

claritycap.co.uk

ClarityCap[®]
AUDIO GRADE CAPACITORS

