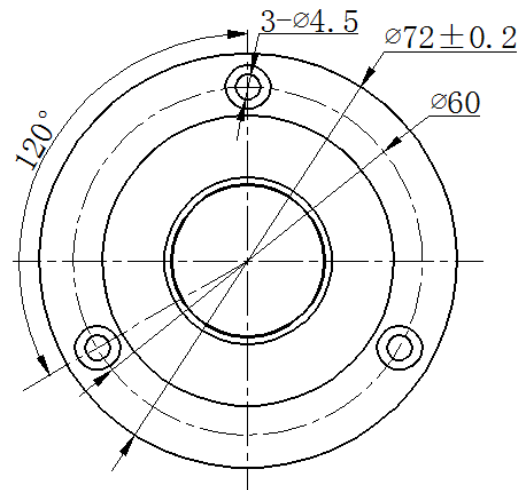
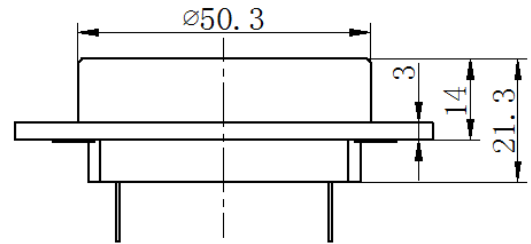
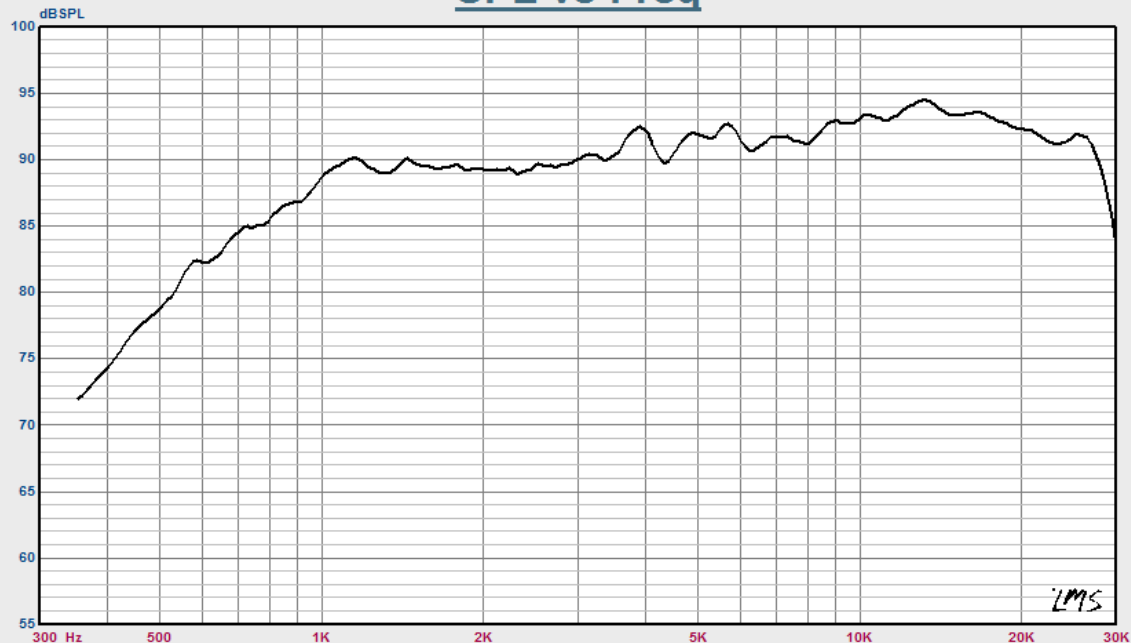


SPECIAL FEATURES:

- ◆ Tweeter
- ◆ Silk-dome
- ◆ Neo magnet system
- ◆ Plastic faceplate

**SYSTEM SPECIFICATION**

Nominal Impedance	6 Ohm
DC resistance	5.6 Ohm
Nominal Power(IEC60268-5)(HP3KHz -18dB/Oct)	40 W
Sensitivity(SPL 1M /1W)	91 dB
Free air resonance:Fs	900 Hz
Frequency range	FS-25K Hz
Magnet dimensions $\Phi \times H$	$\Phi 24.5 \times 3$ mm
Voice coil diameter	25.4 mm
Voice coil height	1.8 mm
Air gap height	2.0 mm
X max	± 0.1 mm
Effective Cone Area	-- cm^2
Moving mass(incl.air)	-- g
Force factor,B*L	-- TM
Vas	-- L
Qms	--
Qes	--
Qts	--
Weight	75 g

**SPL vs Freq**

Drawer:

Checked:

Approved: