


## Features


- ◆ Polypropylen film capacitor with foil electrode
- ◆ Gold plated Pb free OFC lead wire
- ◆ Optimum material and structure for digital audio products, such as CD/SACD players
- ◆ Superior frequency response and temperature characteristics
- ◆ RoHS Compliant

## Construction and Materials

Category temperature range	-40°C ~ +85°C
Rated voltage	100V DC (2A)
Rated capacitance range (pF)	100 ~ 8,200
Rated capacitance tolerance	±5% (J)
Dissipation factor	< 0.1% (at 1KHz 20°C)
Insulation resistance	> 45,000MΩ (at 100V DC)
Body	Epoxy resin (Black)

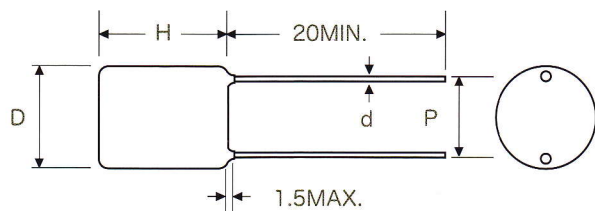

address	pF	D	H	P	d
101	100	6.5	9.0	5.0	0.5
121	120				
151	150				
181	180				
221	220				
271	270				
331	330				
391	390				
471	470				
561	560				
681	680	7.0	9.5		
821	820				
102	1,000				
122	1,200				
152	1,500				
182	1,800				
222	2,200				
272	2,700				
332	3,300				
392	3,900				
472	4,700	8.0			
562	5,600				
682	6,800				
822	8,200				

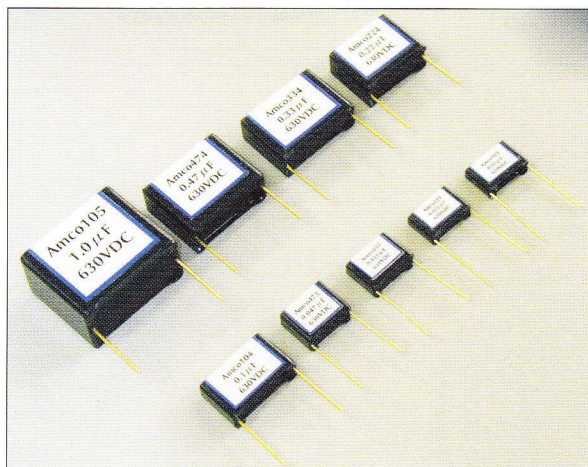

## Features

- ◆ Metalized PET film capacitor with 630V rated voltage suitable for tube amplifiers
- ◆ Gold plated Pb free OFC lead wire
- ◆ Special capacitor structure to reduce current distortion
- ◆ RoHS compliant

## Construction and Materials

Category temperature range	-40~100°C
Rated voltage	630V DC (2J)
Rated capacitance range ( $\mu F$ )	0.01/0.022/0.033/0.047/0.1/0.22/0.33/0.47/1
Rated capacitance tolerance	$\pm 20\%$ (M)
Dissipation factor	< 0.01% (20°C 1KHz)
Insulation resistance	> 15,000M $\Omega$ (C > 0.33 $\mu F$ ) > 5,000M $\Omega$ (C > 0.47 $\mu F$ )
Body	Epoxy resin (Black)

## Style

Type	Capacitor $\mu F \pm 10\%$	Dimension(mm)				
		W	H	T	F	d
Amco103	0.01	17.0	12.0	5.0	15.0	0.6
Amco223	0.022		12.5	5.5		
Amco333	0.033		13.0	6.5		
Amco473	0.047		16.0	6.5		
Amco104	0.1	25.0	19.5	10.0	22.5	0.8
Amco224	0.22		22.0	11.0		
Amco334	0.33	30.0	24.5	13.5	27.5	0.8
Amco474	0.47		30.5	13.5		
Amco105	1.0	36.0	30.5	20.0	32.5	

