

ETI BULLETPLUG® RCA CONNECTOR



The ETI BulletPlug® is a totally new approach to RCA/phono connection in which every aspect of electron flow has been considered.

The result is an RCA compatible connector that can improve the performance of any analogue, digital or video cable — often dramatically.

The ETI BulletPlug® represents a radical departure from conventional RCA designs. Rather than overwhelm the user with mass, thickness, and a jewelled contact surface, the ETI BulletPlug® is a minimalist design in which thickness, mass, materials, and contact surface area have been optimized for better sound, higher resolution video, and enhanced signal integrity. Listening was a major part of its development.

Most audio/video cables are made from highly conductive annealed copper or silver wires — terminated with low-conductive, nickel and gold-plated brass RCA plugs. Annealed copper has a conductivity rating of at least 100% IACS (International Annealed Copper Standard). Brass has a conductivity rating of 28% IACS.

Because of this low conductivity, we believe conventional RCA plugs act as a bottleneck to electron flow. These plugs may also cause phase errors and smearing through mass and skin effect.

Another problem relates to the return/ground collar which can impair electron flow through:

- Eddy current distortion — as electrons proceed to and from the RCA socket into the collar through multiple contact points the equivalent of electron turbulence occurs. Signal degradation results
- Capacitive distortion — where gaps exist between the socket and collar
- Micro-arcing distortion — an electrical short that can occur where gaps exist between the socket and collar

Additionally, RCA plugs are coaxial designs (metal return/ground surrounding signal pin) that have an impedance effect. This impedance can have a varied and adverse impact on performance.

The ETI BulletPlug® solves these problems by providing a faster, cleaner signal of high purity and detail. To achieve this we have designed the BulletPlug® as a miniature cable — with high-conductive, gold-plated tellurium copper (CuTe) pins—as our standard product—providing rapid transfer of electrons to and from RCA sockets.

Additionally, the ETI BulletPlug® features direct 24k gold flashing over the tellurium copper conductor. This eliminates the nickel plating typically found on even the most deluxe and expensive RCA jacks as a third (and dissimilar) metal. The sole reason for using nickel under gold is to provide the shiny jewelled look that makes expensive connectors look expensive. It is not used for sound quality or signal integrity. In fact almost everything done to provide this look runs counter to good sound and in fact degrades performance.

In our patented design, the return pin makes single point contact with the side wall of an RCA socket — concentrating electrons to one point thereby reducing distortion. This is a similar approach to “star earthing (grounding)” used in amplifiers.

For the ultimate in RCA/phono connection, ETI also offers the BulletPlug® in pure silver. Utilising the same patented RCA blueprint, the silver ETI BulletPlug® provides enhanced conductivity for what is arguably the absolute best level of performance available.

The contact pins are machined from hard drawn 4-nines pure silver rods, and then treated with Caig PreservIT — which leaves a microscopic protective coating to prevent oxidation and enhance conductivity. Sound quality is superb, with subtle but significant improvements over the standard tellurium copper plug. The silver ETI BulletPlug® is ideal for silver interconnects and any high performance cable.

Home Theatre

The importance of the RCA plug is often overlooked in the context of a high resolution video or home theatre system. Yet the quality of the RCA plug can have a disproportionate effect on the final performance of the system. This is easy to understand when two points are taken into consideration.


1. The delicate nature of the tiny millivolt-level signals flowing through a system's interconnect, digital, and video cables
2. The number of times these signals cumulatively travel through RCA connectors (usually low-conductive ones) en-route to their destination

Central to the ETI BulletPlug® design was the preservation of the delicate signals that represent the picture that will ultimately be seen and the audio that will ultimately be heard.

The ETI BulletPlug® has arguably obsoleted every other RCA jack in the world intended for use in high resolution applications. And nowhere is this more evident than its use in high quality home theatre systems.

®Registered, U.S. Patent and Trademark Office

®Registered, European Community

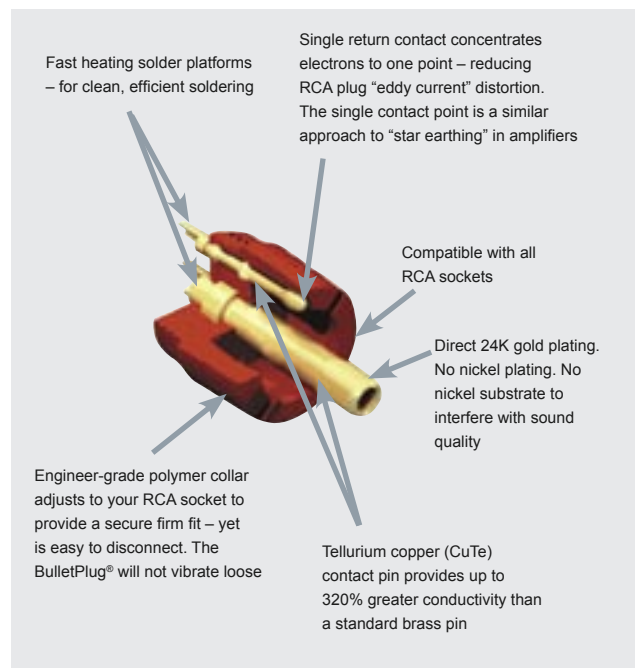

ETI BULLETPLUG® RCA CONNECTOR



EICHMANN TECHNOLOGIES INTERNATIONAL



BULLETPUG® RCA CONNECTOR

The ETI BulletPlug® is a totally new approach to RCA connection. It represents a wholesale rethinking of something as basic as the venerable RCA jack; a connector designed over fifty years ago by The Radio Corporation of America. It is our contention that the RCA plug in its current configuration is the standard connector in the audio/video industry not because it is the best possible choice for its intended use, but more by reason of default than any other.

Realising this to be the case we decided to undertake a project of major significance—the wholesale redesign of this critically important, but very compromised connector, with the objective being improved conductivity, enhanced signal integrity, and higher resolution. Since the RCA jack is so widely used—connecting virtually every component in an audio/video chain, linking a multitude of components through a network of interfaces—any improvement in its performance in the critical areas of electron flow and signal integrity would be significant; and particularly important in high resolution applications.

A first evaluation of the RCA jack pointed up obvious metallurgical shortcomings. Most connectors, even those marketed as “deluxe” upmarket RCA jacks, are made from nickel and gold plated brass or phosphor bronze with a conductivity rating typically less than 28% IACS (International Annealed Copper Standard). As a comparison, the high purity copper used in the vast majority of interconnect cables has a conductivity rating of 100% IACS. Because of this low conductivity and the use of three disparate metals, it is our contention that standard RCA jacks—even expensive, flashy ones—compromise electron flow and diminish the performance of the components they connect.

Nickel is added solely to provide the jewel-like appearance that makes expensive connectors look expensive. While achieving the desired appearance, it comes at a cost—degraded sound or poorer picture quality, as electrons flow through three dissimilar metals with differing electrical and conductive properties.

The conductive surfaces of the ETI BulletPlug® in contrast are machined from high-purity tellurium copper (over 90% IACS) or pure silver (106% IACS) to ensure maximum conductivity. This provides up to 320% greater conductivity than the gold plated brass connectors used in the vast majority of deluxe RCA jacks. Proven metallurgical choices result in better signal transfer, and electron flow that is consistent with the highest quality interconnect cables.

24k gold is direct plated to the conducting surfaces of the tellurium copper BulletPlug®, eliminating the nickel plating typically used as the third metal in a confusing composite on standard RCA jacks. Gold is applied to prevent oxidation, and contrary to popular opinion, is not a factor in sound quality. Our Silver BulletPlug® utilizes 4-nines pure silver (106% IACS) and is treated with a Caig PreservIT antioxidant solution, with no additional plating, to preserve signal quality.

While the metallurgical understandings were significant—and rather straightforward—the second observation regarding the RCA jack turned out to be ground-breaking. It related to a problem, overlooked for decades, that is intrinsic to the RCA jack’s design—something as fundamental as the architecture of the jack itself.

This RCA ground collar, acting as a conductor that transfers electrons from multiple directions between the centre pin and its surface—is prone to the small out-of-control turbulences called eddy currents. These turbulences are nothing less than electron chaos, exacerbated by the non specific point of ground in the RCA jack’s design, as an entire surface encircling the centre pin forms the electrical ground. Capacitive reactance and micro-arcing are additional artifacts of this architecture.

The BulletPlug® addresses these issues and offers an elegant—and arguably major—redesign to the RCA jack that is so fundamental and so extensive that we have been granted a US patent; we have a European patent application in process, and other international patents pending.

Rather than encircle the centre conductor pin with a formed metal collar as ground, we opted for a single point ground contact similar to star earthing (grounding) in high-end electronics. Our new design, featuring single point ground connection and optimised shape, mass and thickness of the conductive elements, eliminates every vestige of eddy current turbulence, capacitive reactance, and micro-arcing.

We believe we have, with this new RCA blueprint, solved a series of problems that collectively degrade audio/video performance and that do so in an additive manner. The importance of this innovation cannot be overstated—its ramifications extend to every RCA interface in which high quality signal transfer is an issue. Extensive listening and critical comparisons played a major role in the evolution of the design, confirming at every juncture the audibility of properly applied science in even the area of RCA connection.

In summary the BulletPlug® is a totally new approach to RCA connection. Its innovations and refinements include:

- incorporating high conductive materials such as tellurium copper or pure silver exclusively in the construction
- optimising mass and thickness of the conductive element to enhance electron flow
- rejecting the idea of using a formed metal collar to encircle the centre pin and serve as the reference to ground
- using single point star earthing (grounding) instead to eliminate eddy current distortions, capacitive reactance, and micro-arcing
- attention to the mechanical aspects of the design to ensure the ultimate connection while eliminating damage to input connectors

(Internationally patented product)
 (Registered, European community)
 (Registered, US Patent and Trademark Office)

BULLETPUG® RCA CONNECTOR

Features comparison vs. typical rca jacks

Standard RCA jacks	BulletPlug® (tellurium copper)	BulletPlug® (4-nines pure silver)
Gold plated brass or phosphor bronze with a conductivity rating of often less than 28% IACS (International Annealed Copper Standard).	A contact element machined from high-purity tellurium copper (over 90% IACS) for excellent conductivity. Provides up to 320% greater conductivity than gold plated brass binding posts.	A contact element machined from 4-nines pure silver (106% IACS) to provide ultimate conductivity.
Solid signal pin. Metal collar completely encircling pin as electrical ground. Total thickness and mass not optimised for signal integrity. Sound quality and electron flow compromised.	Hollow signal pin of ideal thickness and mass – to support current flow and to minimise skin effect problems. The result is a clean, open sound with improved detail.	Hollow signal pin of ideal thickness and mass – to support current flow and to minimise skin effect problems. The result is a clean, open sound with improved detail.
Heavy plating of gold over a nickel substrate. This is often a cause of poor sound quality as electrons flow through 3 dissimilar metals with differing electrical and conductive properties.	Direct 24k gold plating (no nickel substrate) to prevent oxidation – and not to influence sound quality.	Unplated. Treated with Caig PreservIT antioxidant solution.
Ground collar surrounding centre pin has a detrimental effect on electron flow. Eddy- current turbulences created as a result of non specific ground contact. Loss of signal integrity. Increase in capacitive reactance and micro-arcing. Reduced resolution.	Patented single point ground pin. Eliminates eddy-current turbulences, capacitive reactance, and micro-arcing. Improved sound/video quality. Better signal integrity. Better electron flow; and higher resolution.	Patented single point ground pin. Eliminates eddy-current turbulences, capacitive reactance, and micro-arcing. Improved sound/video quality. Better signal integrity. Better electron flow; and higher resolution.



EICHMANN TECHNOLOGIES INTERNATIONAL

BAYONET PLUG® BANANA CONNECTOR Technical papers 2/2

© Copyright 2006 Eichmann Technologies International | Brisbane, Queensland, Australia | www.eti-designs.com.au